


Before disposing of the carton and commencing installation, please check all parts against the parts list on back page. Please contact us immediately if any parts are missing or damaged.

Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL Telephone: 02392 255536 Email: tech@swadlingbrassware.co.uk

INSTALLATION

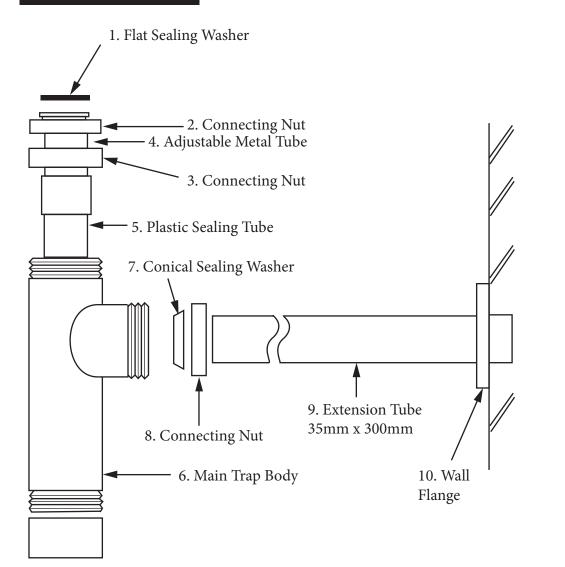

This bottle trap is supplied fully assembled, check all components shown on the drawing are present.

- 1. Before commencing installation, loosen the connecting nut (3) to enable free movement of the adjustable inlet metal tube (4)
- 2. Ensure the flat sealing washer (1) is fitted into the connecting nut (2). Fit the trap to the waste outlet.

3. Fit the connecting nut (8) and the conical washer (7) to the extension tube (9).

4. Fit wall flange (10) to the extension tube (9) and position as required. Connect to the waste outlet pipe. The best method of connecting to the waste outlet pipe is by using a 1¼" plastic multi-fit connector compression type. This connector is not supplied with this set.

5. Once the height of the bottle trap has been determined, tighten the connecting nut (3).

6. Upon completion, fully check the installation and ensure there are no leaks.