





ASP/MATKI ONE HINGE PANEL

INSTALLATION

Please pass the
Guarantee Card
to the customer.

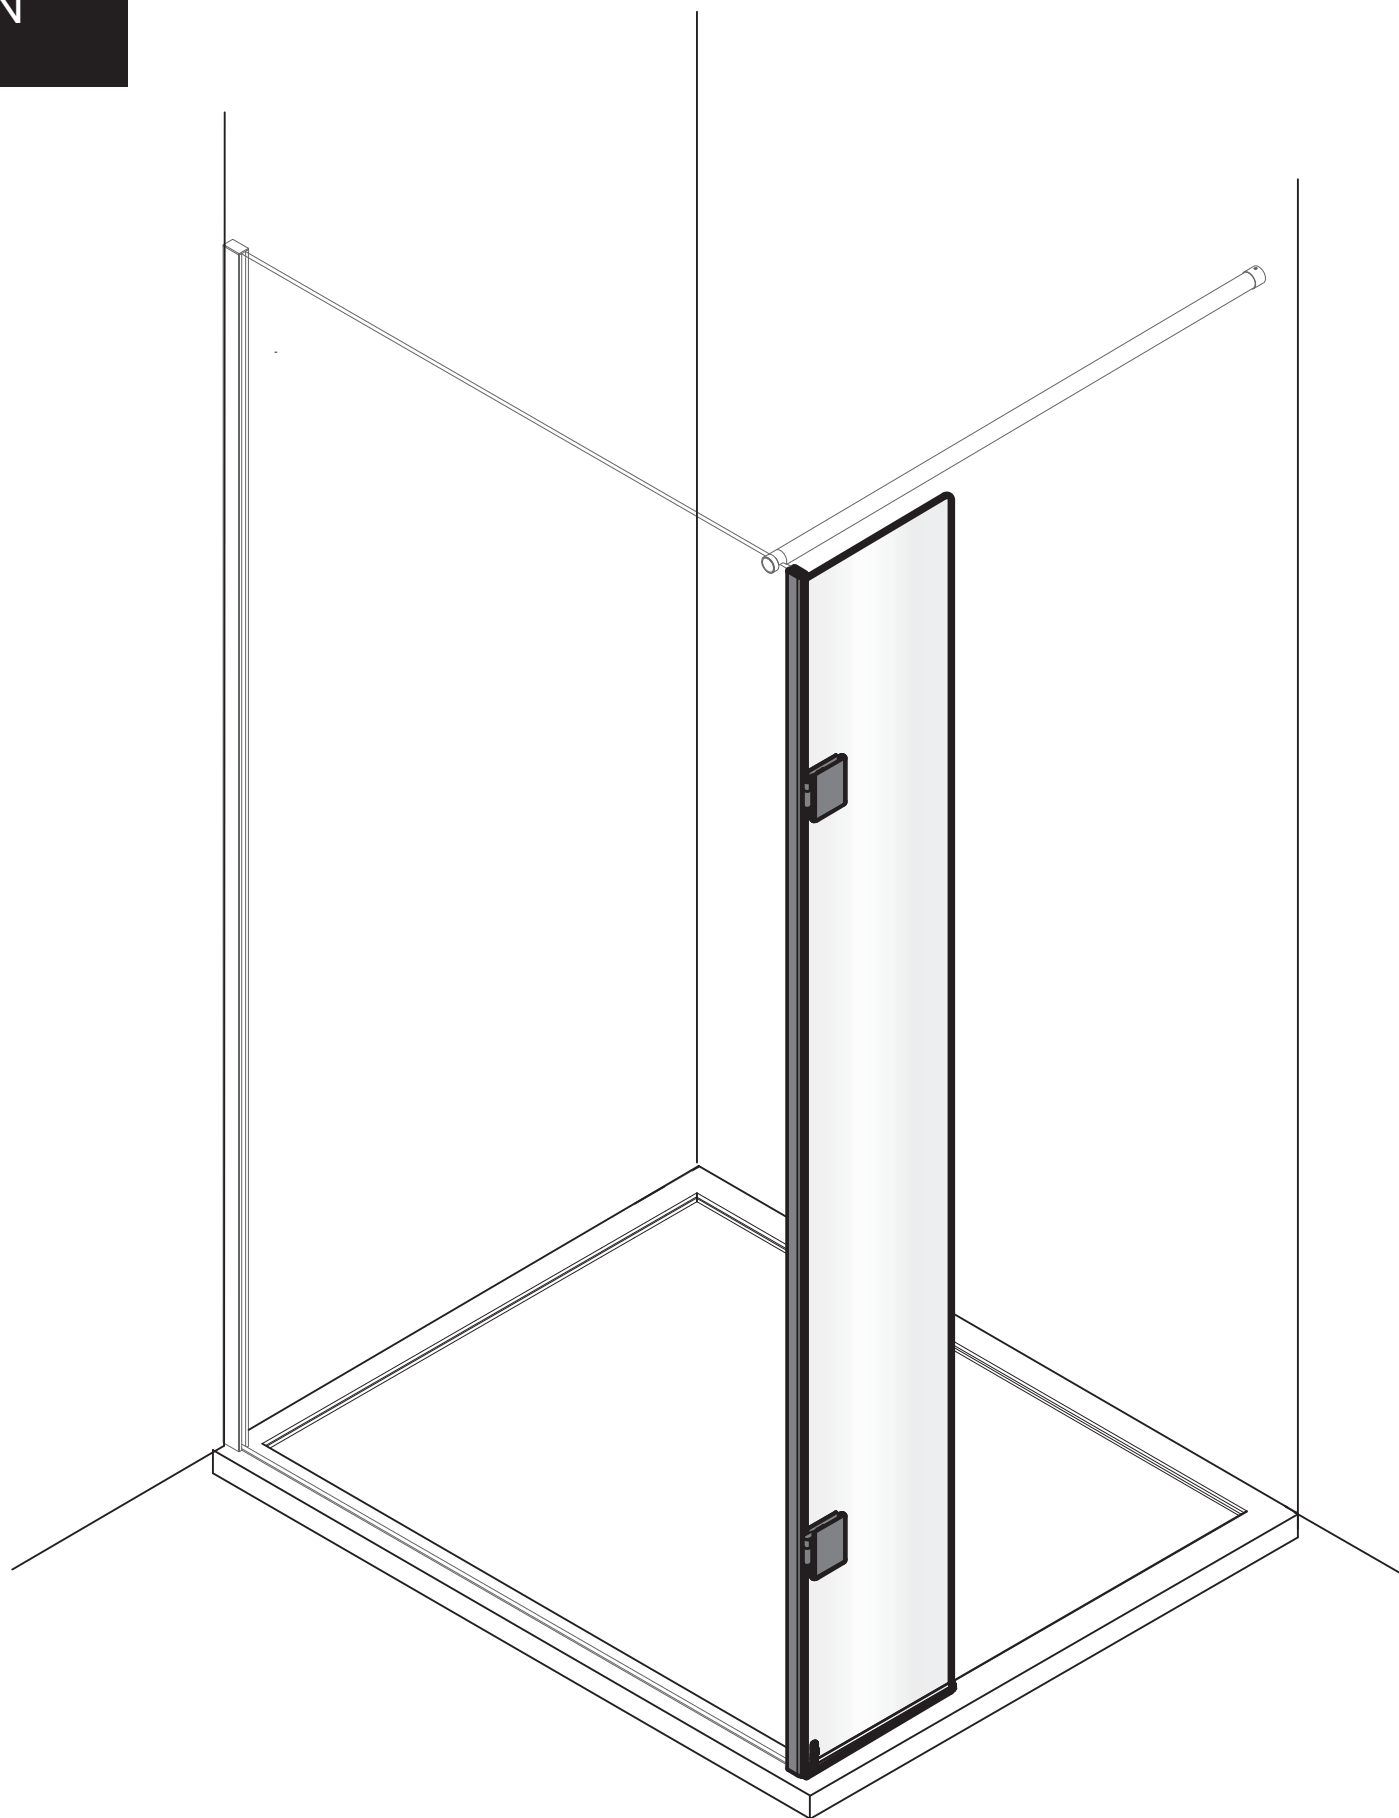

MATKI PLC, CHURCHWARD ROAD, YATE, BRISTOL, BS37 5PL
TELEPHONE:01454 322888 (CUSTOMER SERVICES) EMAIL: techsupport@matki.co.uk


DISCLAIMER

PLEASE NOTE:

CHECK **BEFORE** ATTACHING THAT ALL PARTS ARE CORRECT AND FREE FROM MARKS.

ONCE THE HINGE PANEL IS ATTACHED IT **CANNOT** BE REMOVED AND REPLACED.

ATTEMPTING TO REMOVE THE HINGE PANEL ONCE FITTED IS LIKELY TO DAMAGE THE FIXED PANEL AND MAY RESULT IN THE WHOLE UNIT NEEDING TO BE REPLACED.

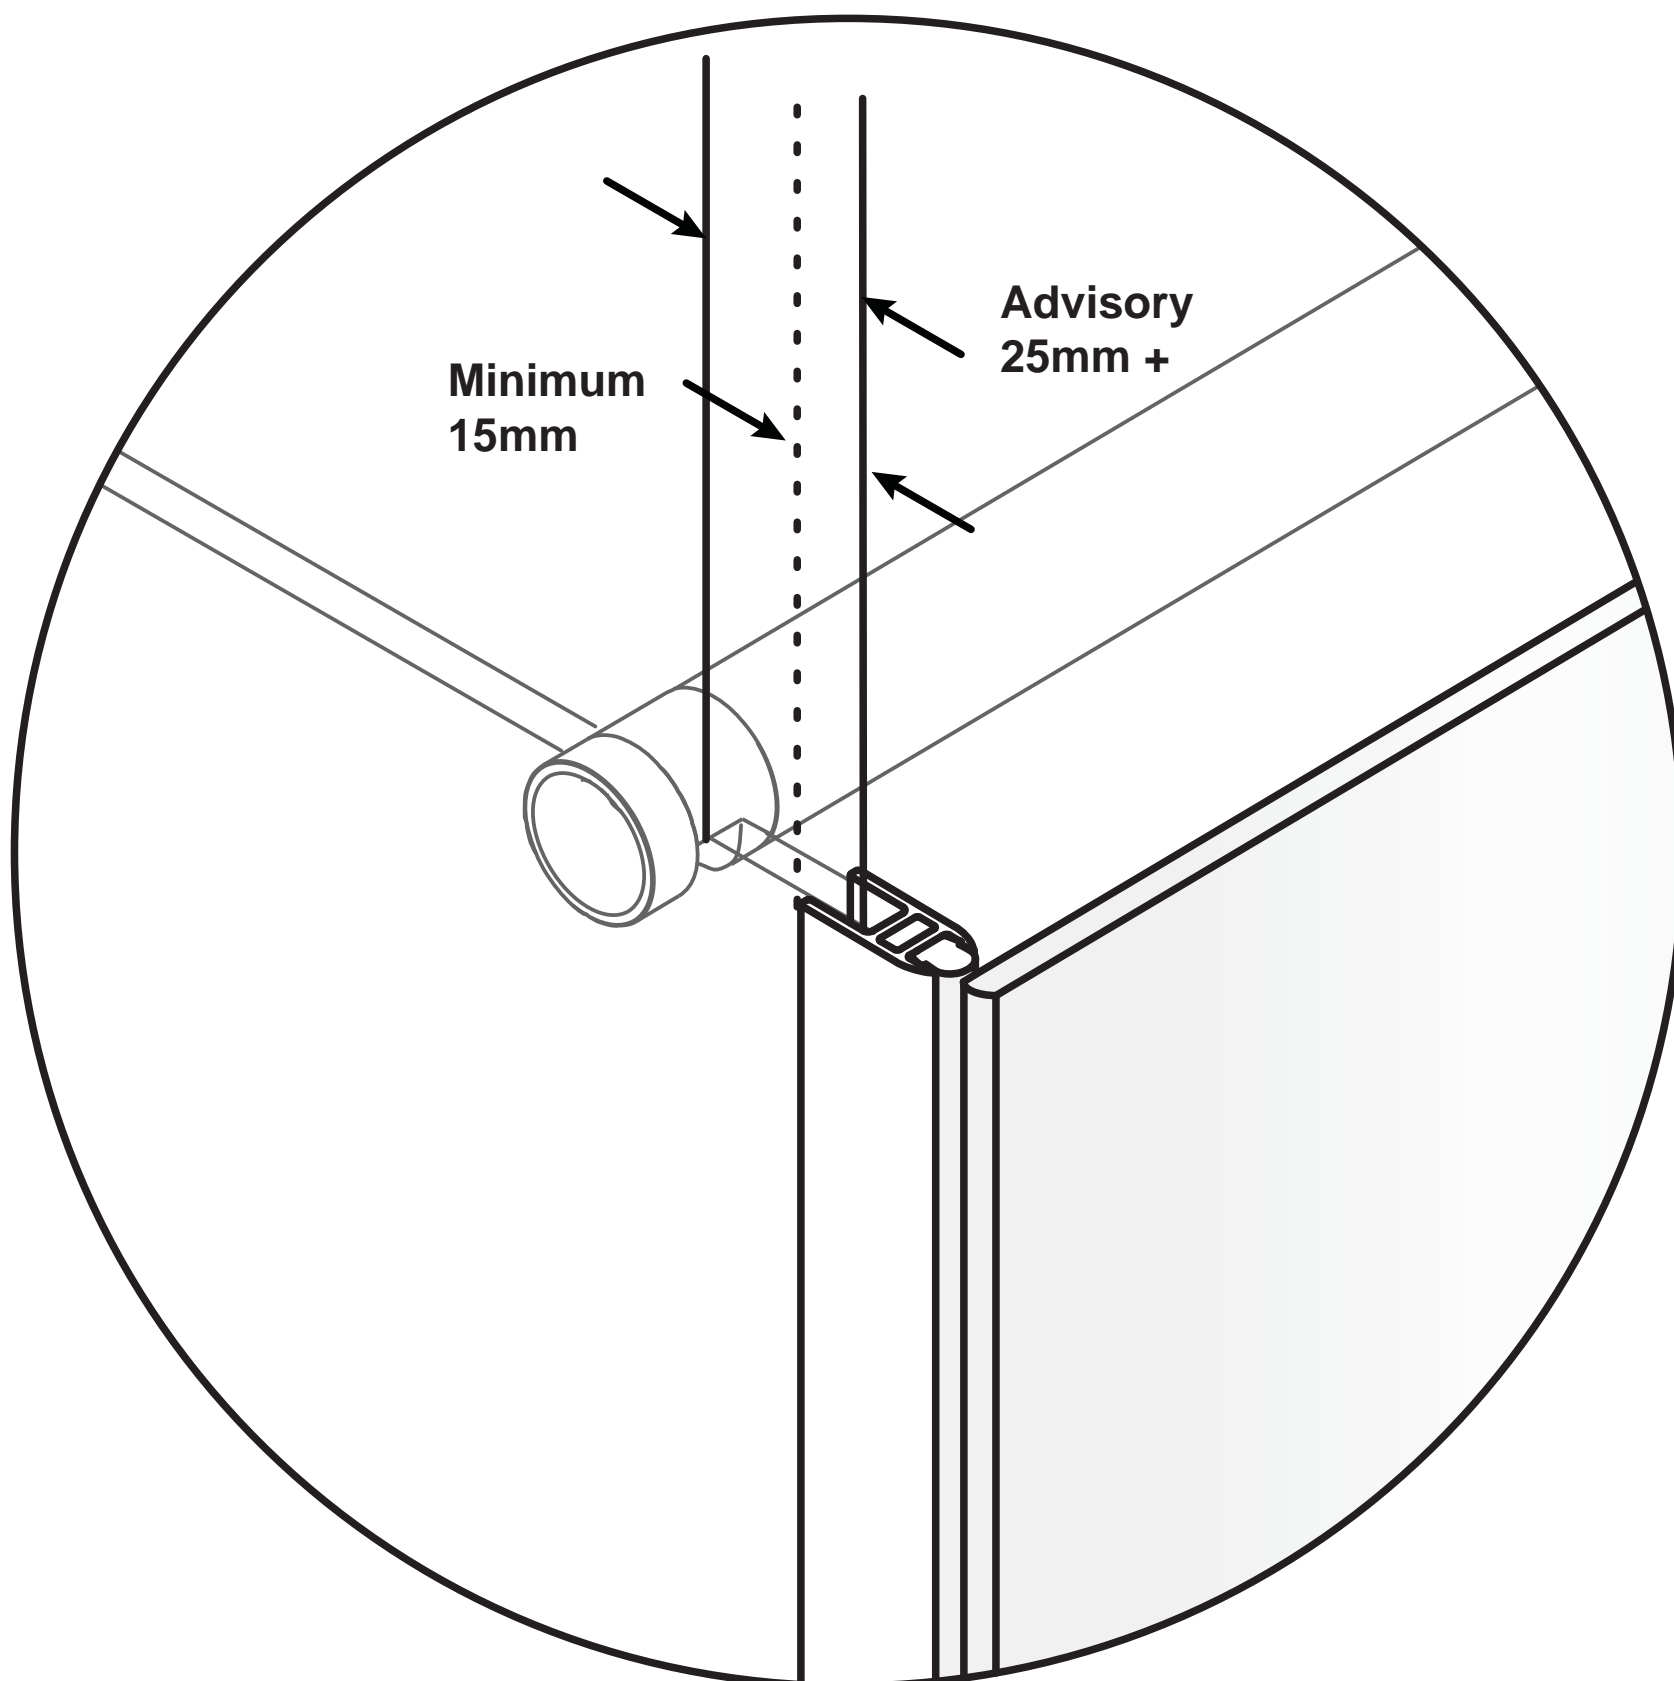


IMPORTANT:

CHECK **BEFORE** ATTACHING THAT THE BRACE BAR ON THE PRE INSTALLED FIXED PANEL IS A MINIMUM OF 15MM FROM THE END OF THE FIXED PANEL IN ORDER FOR THE HINGE PANEL TO FIT. WE ADVISE THAT THE BRACE BAR IS FITTED **25MM +** FROM THE END OF THE FIXED PANEL.

STAGE 1


This stage shows the fitting of a LH panel.

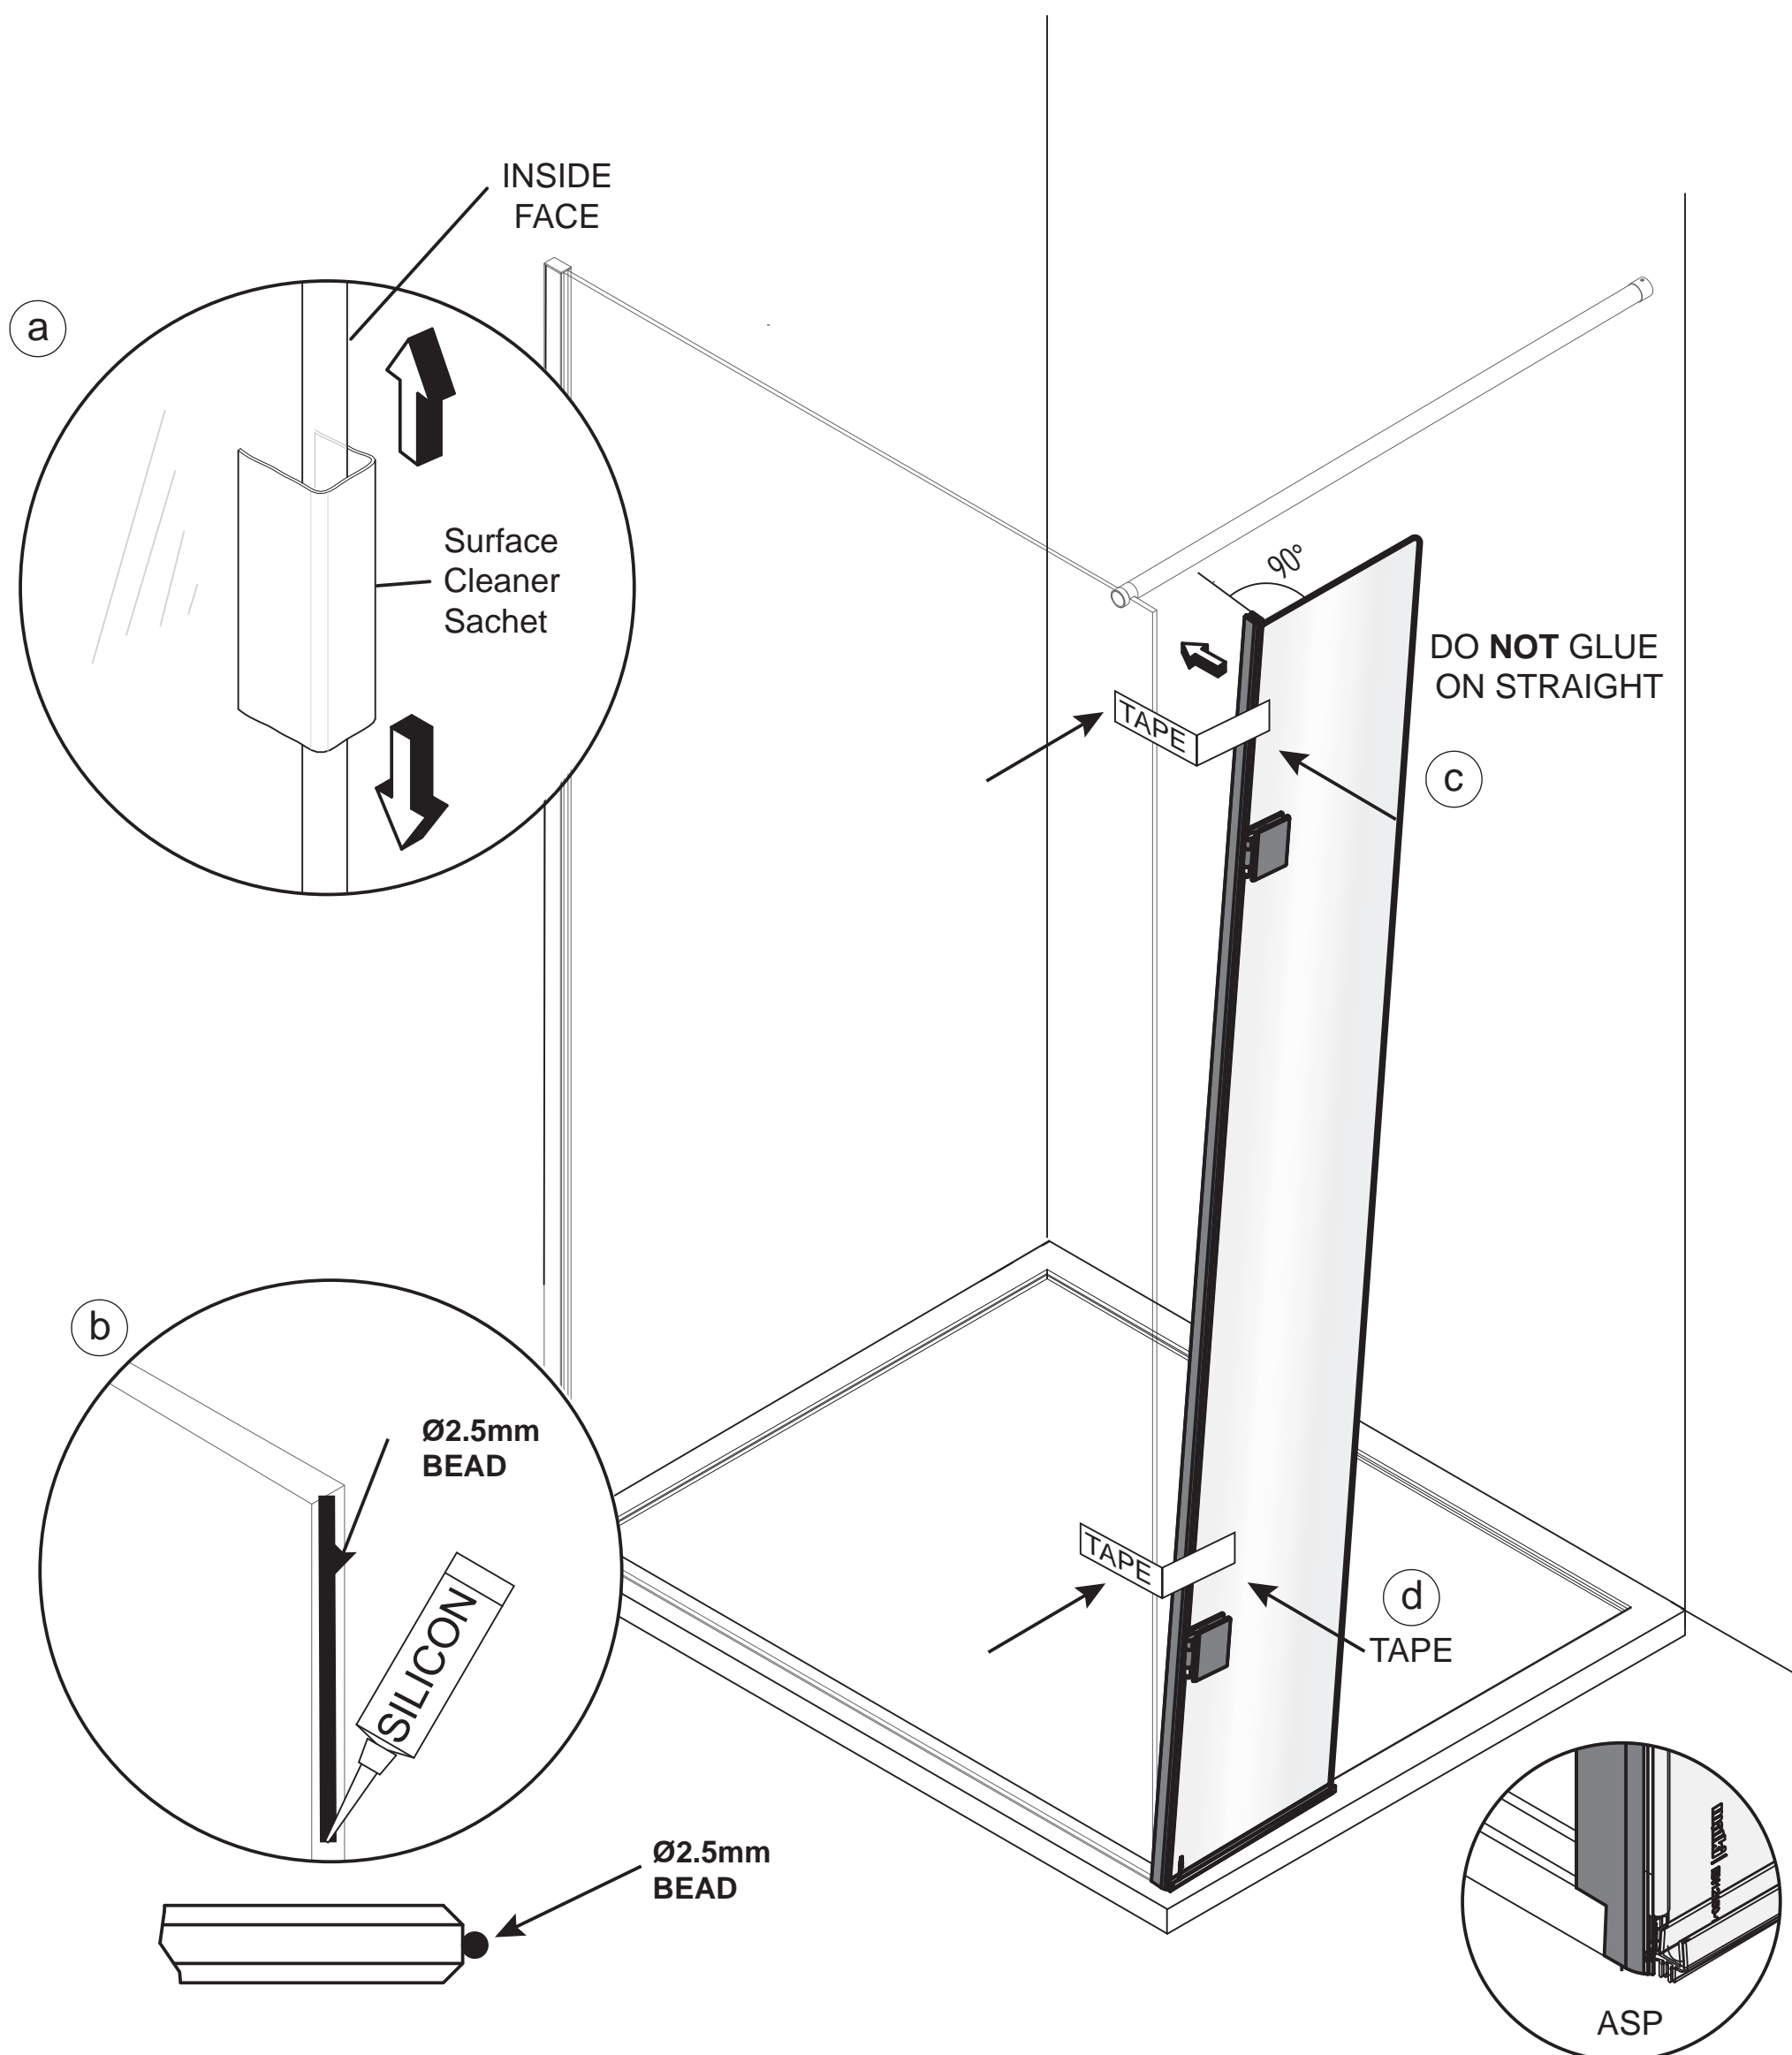

This stage is describing the fitting of the Hinged Panel.

- Thoroughly clean the edge of your existing glass panel with surface cleaner sachet provided in the kit of parts.
- Apply a Ø2.5mm bead of silicon to the end edge of the Fixed Panel.
- Press the Hinge Panel, angled at 90° to the end edge of the Fixed Panel (Do NOT put on straight).
ASP: frame has notch cut out at the bottom to slot over the glass extrusion
- Apply tape to the Hinge Panel and Fixed Panel to hold the Hinge Panel in position. Allow 24 hrs for the silicon to cure.

STAGE 2

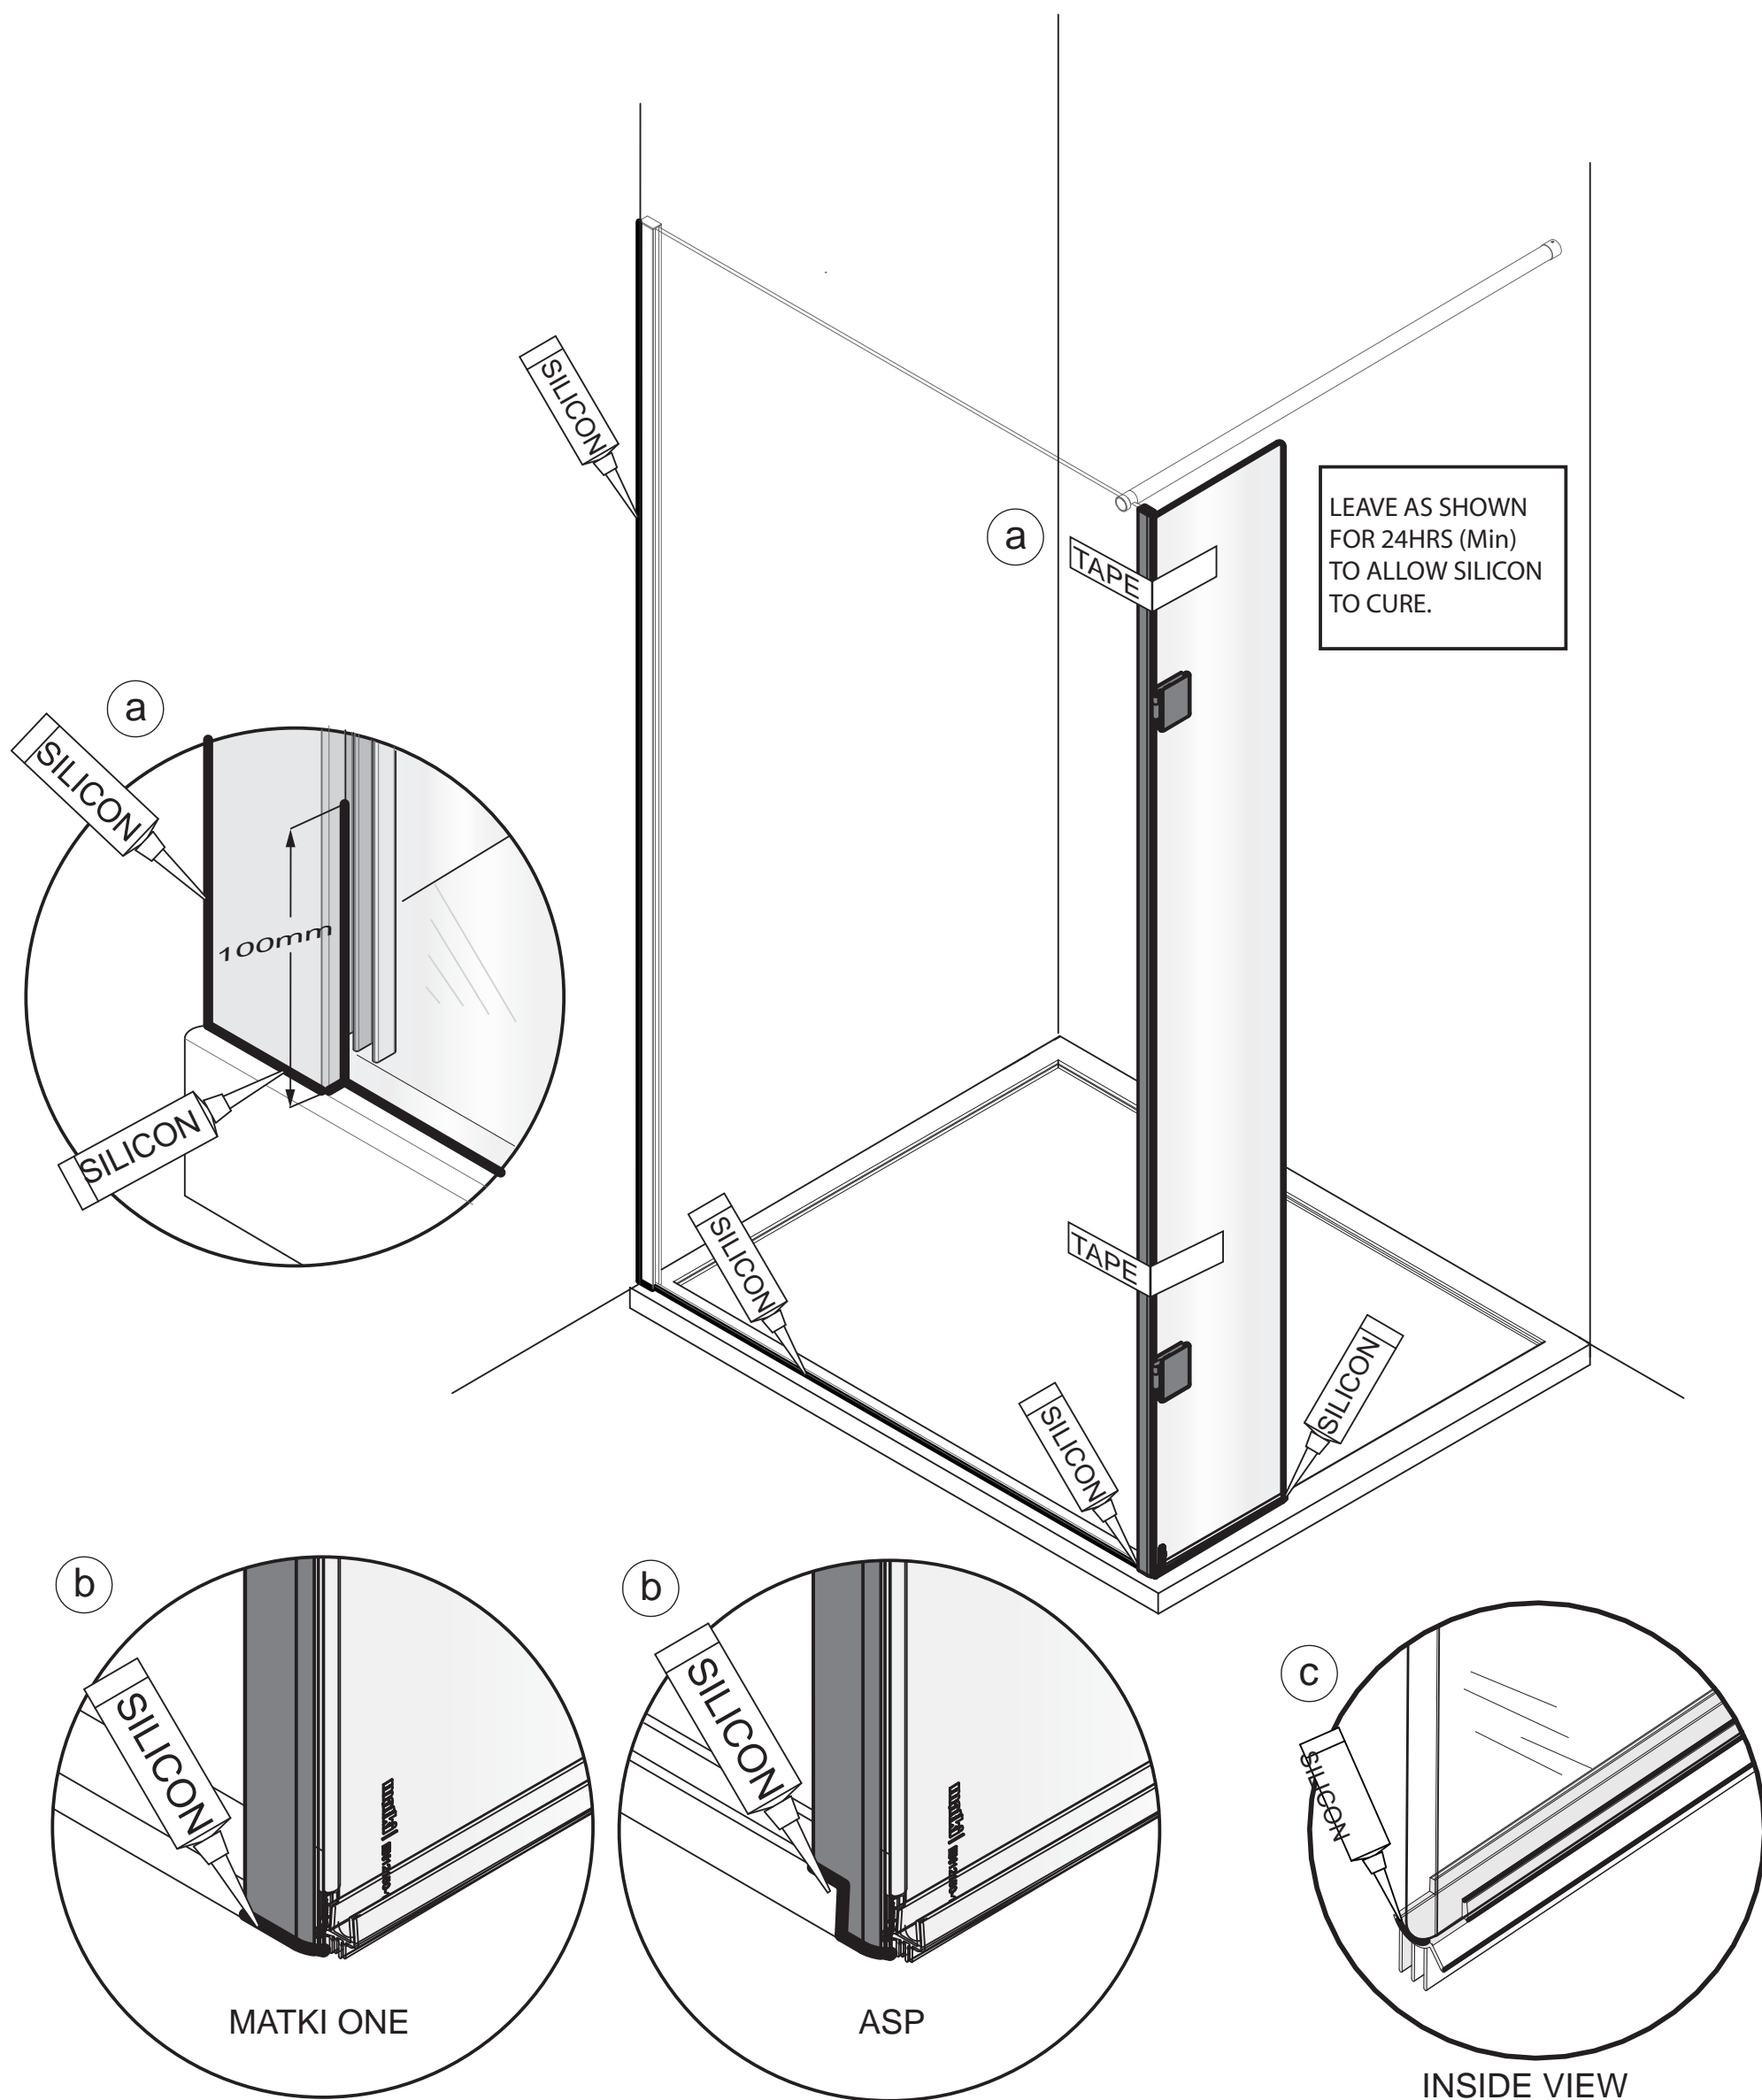

This stage is describing the sealing of the unit.

a. Apply a thin bead of silicon sealant on the outside, along the bottom edge of the wall mount and Fixed Panel glass (if not already fitted).

b. Continue the sealant around the base of the vertical hinge seal and insert a small bead into the end of the vertical hinge seal hollow bubble. ASP: Seal around the cut out notch of the frame.

c. Apply a small spot of silicon sealant at both ends of the horizontal seal between the bottom edge of the glass panel and seal. Leave the Hinge Panel in the closed position and allow 24 hrs for the silicon to cure.

PARTS LIST

* COLOUR VARIANT ON PARTS

MAIN PACK

PARTS LIST			
ITEM	DESCRIPTION	PART No	QTY
1	300mm HORIZONTAL SEAL	7413 CLEAR	1
*2	HINGE FRAME: MATKI ONE	8326 SILVER	1
*2b	HINGE FRAME: ASP	8344 SILVER	1
3	ASP HINGE PANEL	8331 MGG CLEAR/PLAIN	1
*4	HINGE ASSEMBLY	7004 A SILVER	1
5	VERTICAL SEAL	7407 AF	1
6	BUTTON HEAD M4X8	1276 A SILVER	4

